





СИСТЕМА СТРОИТЕЛЬСТВА ИЗ СТАЛИ УСМ

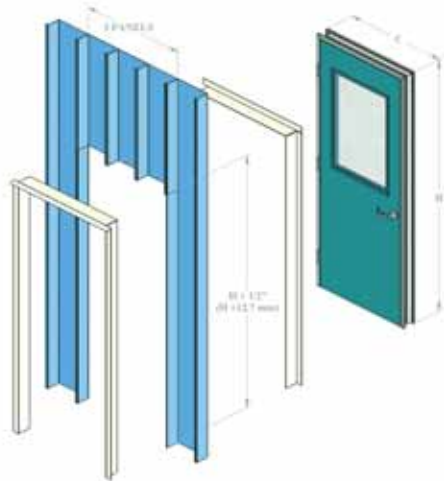


Door Cutout and Installation

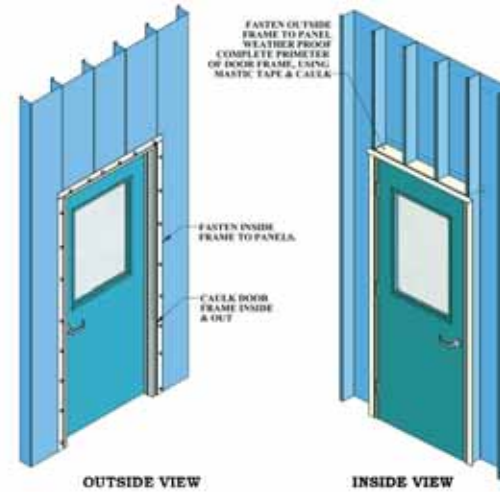


OUTSIDE VIEW

INSIDE VIEW

Typical Door Views

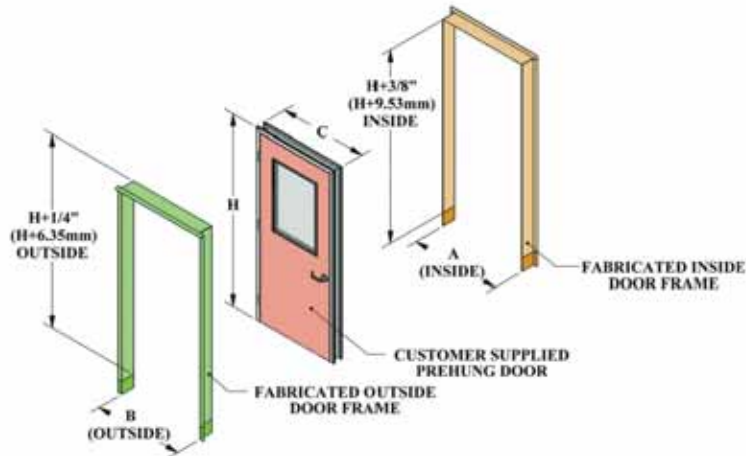

Typical Door Frame

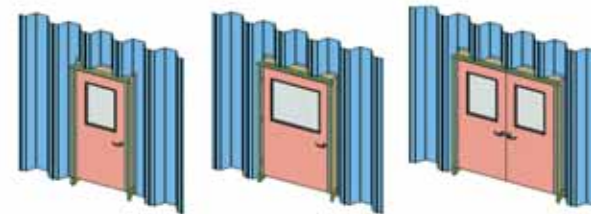

36 in (9 m)
Wide Door

48 in (1.2 m)
Wide Door


72 in (1.8 m)
Wide Door

Various Door Configurations


Door Width	Dimension A (Inside Dimension)	Dimension B (Outside Dimension)	Door Size C (Outside Of Jamb)	Cutout Width
36 in (914 mm)	40.63 in (1016 mm)	40.62 in (1032 mm)	40.3 in (1024 mm)	41 in (1041 mm)
48 in (1219 mm)	52.81 in (1321 mm)	52.63 in (1340 mm)	52 in (1328 mm)	53 in (1346 mm)
72 in (1829 mm)	76.81 in (1930 mm)	76.63 in (1946 mm)	76 in (1938 mm)	77 in (1956 mm)
Other Widths (W)	W + 4 in (W + 102 mm)	W + 4.6 in (W + 117 mm)	W + 4.3 in (W + 109 mm)	W + 5 in (W + 127 mm)



СИСТЕМА СТРОИТЕЛЬСТВА ИЗ СТАЛИ УСМ

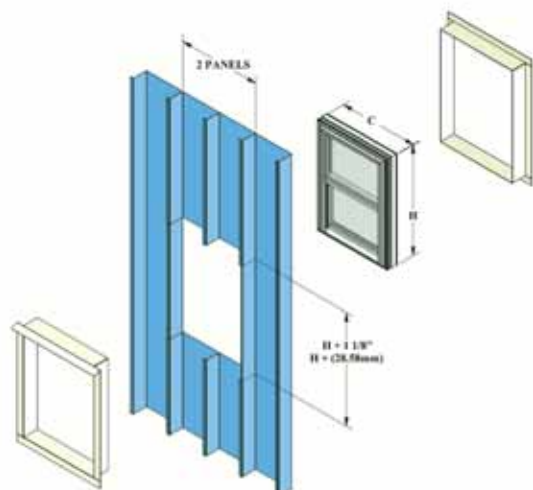


Window Cutout and Installation

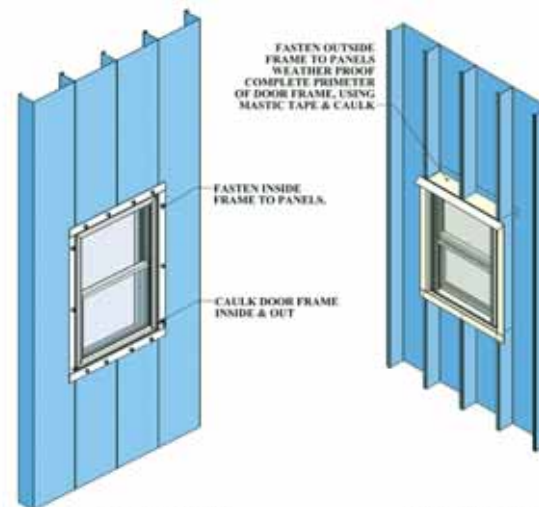


OUTSIDE VIEW

INSIDE VIEW

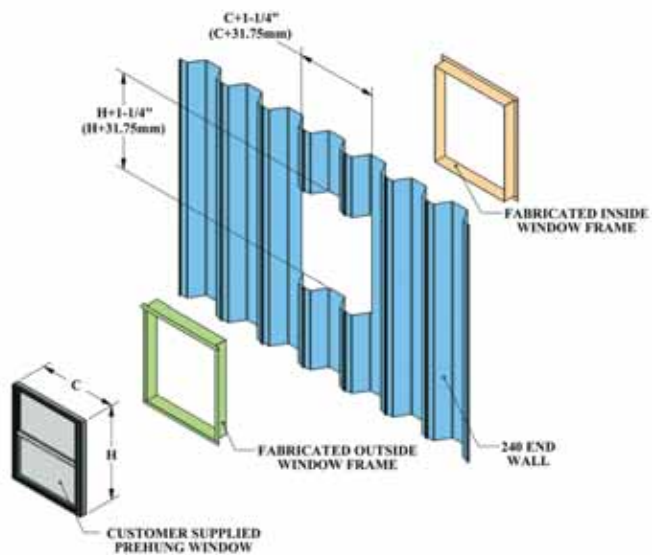

Window Cutout and Installation

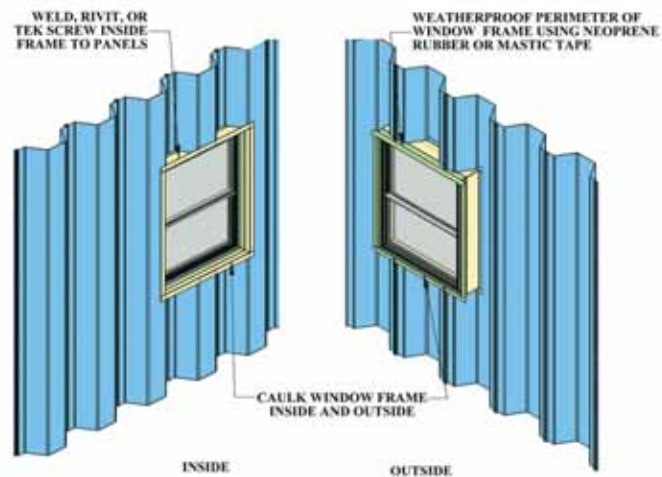

INSIDE

OUTSIDE

Typical Window Views





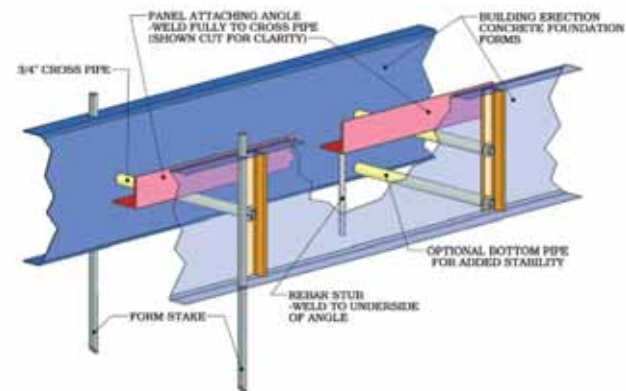




Figure 4 - Building Erection Concrete Foundation Forms

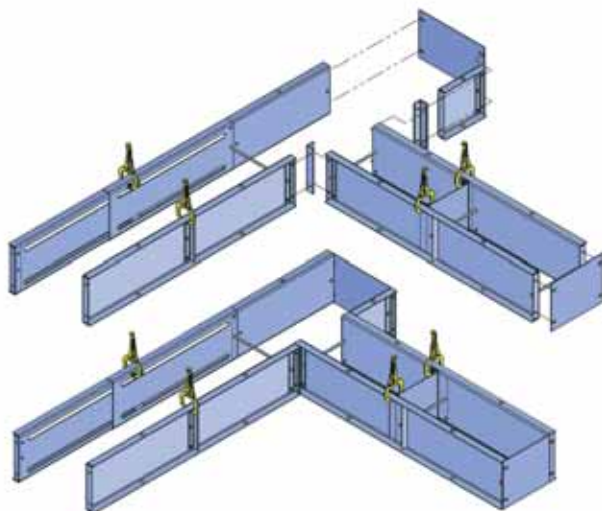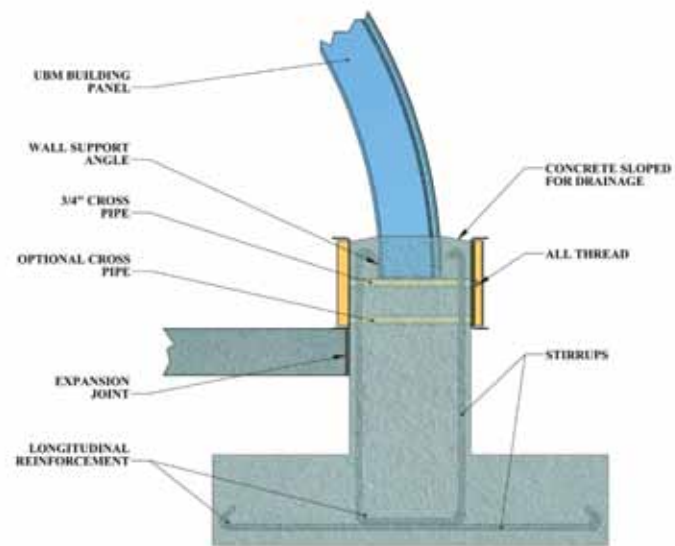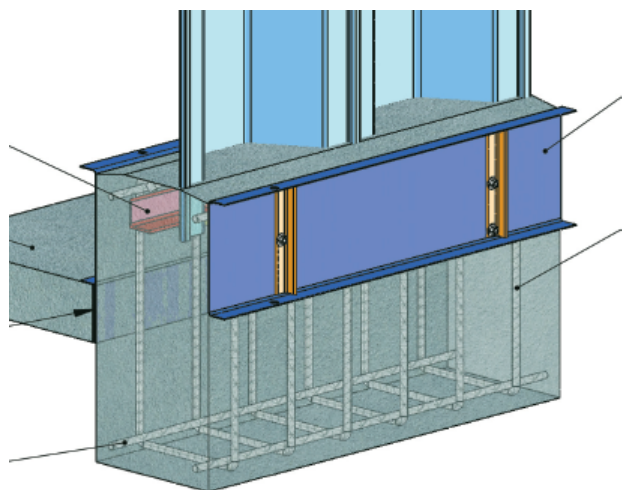

Concrete Foundation Front View (Spread)

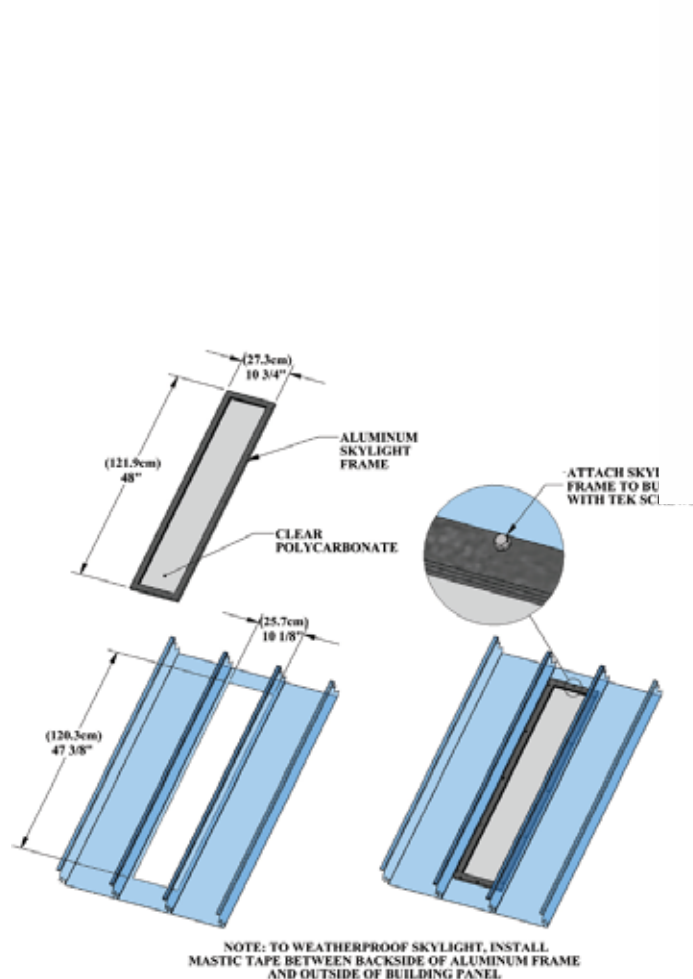

Skylight Installation

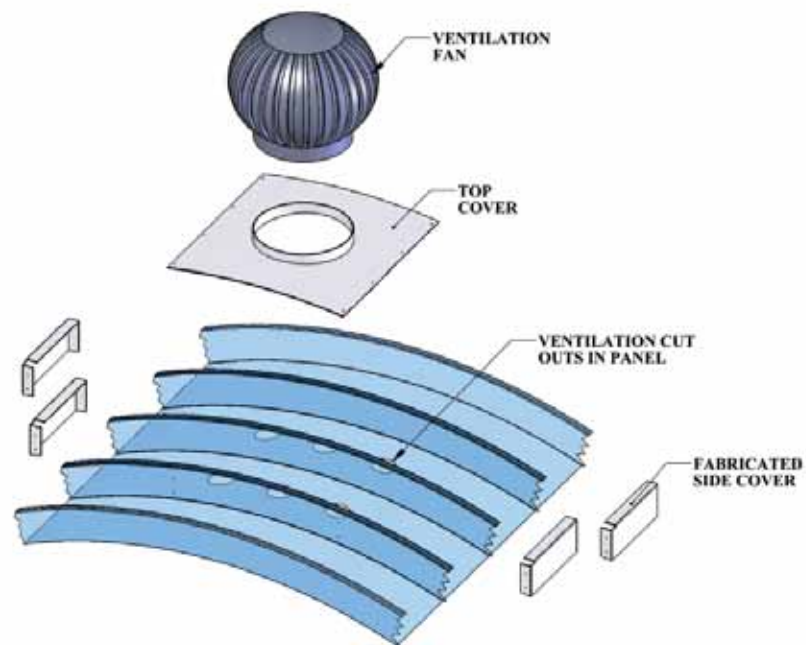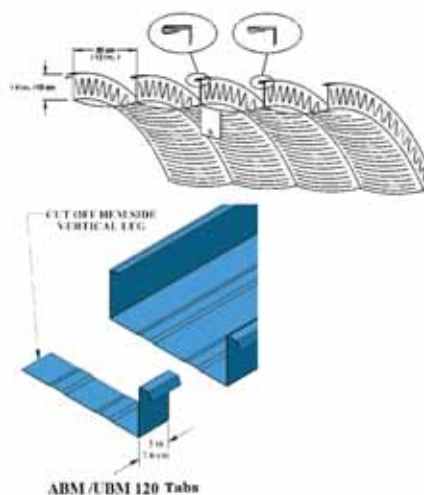

Exhaust Fan Components